

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

130.1003

Total Pages in this Submission

36

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

METHOD FOR CHECKING USER ACCESS

and invented by:

Neil BEESLEY, et al.

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 22 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
130.1003

Total Pages in this Submission
36

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 5
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL 515149894US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
130.1003

Total Pages in this Submission
36

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Additional Enclosures (please identify below):

Letter Re: Priority

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$760.00

- ☒ A check in the amount of \$760.00 to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0552 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance pursuant to 37 C.F.R. 1.311(b).

Signature

Dated: November 24, 1999

William C. Gehris, Reg. No. 38,156
DAVIDSON, DAVIDSON & KAPPEL, LLC
1140 Avenue of the Americas, 15th Floor
New York, New York 10036

CC:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventors: BEESELEY et al.
Title: Method for Checking User Access
Filing Date: Herewith
Art Unit: Not yet known
Examiner: Not yet known

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

PRELIMINARY AMENDMENT

Please amend the above-identified application before a first office action on the merits as follows:

IN THE SPECIFICATION

- On page 1, before line 10, insert --BACKGROUND OF THE INVENTION--.
- On page 2, line 8, change --burdonsome-- to --burdensome--.
- On page 2, before line 15, insert --SUMMARY OF THE INVENTION--.
- On page 2, line 26, change "maybe" to --may be--.
- On page 4, line 7, change "first and" to --first security system and--.
- On page 5, line 4, change "consists of" to --comprises--.
- On page five, after line 8, insert -- The method of the present invention may further include--.
- On page 5, line 19, change "authorisation" to --authorization--.
- On page 5, line 20, change "authorised" to --authorized--.
- On page 5, line 24, delete "as well".
- On page 5, line 25, change "as" to --or--.

On page 6, line 20, change "authorisation" to --authorization--.

On page 6, line 23, change "authorisation" to --authorization--.

On page 7, line 1, change "authorisation" to --authorization--.

On page 7, line 2, change "authorisation" to --authorization--.

On page 7, line 14, insert --a-- before "server".

On page 7, line 16, change "but my be" to --but may be--.

On page 7, last line, change "authorisation" to --authorization--.

On page 7, line 19, change "initialisation" to --initialization--.

On page 9, line 19, change "realisation" to --realization--.

On page 9, after line 20, insert --BRIEF DESCRIPTION OF THE DRAWINGS--.

On page 9, line 22, change "by means of" to --with reference to --.

On page 10, before line 5, insert --DETAILED DESCRIPTION--.

On page 13, line 17, change "consisting of" to --comprising--.

On page 13, line 25, change "by means of" to --using--.

On page 14, line 7, change "otherwise" to --otherwise--.

On page 15, line 7, change "week" to --weak--.

On page 15, line 19, change "synchronise" to --synchronize--.

On page 15, line 12, change "synchronisation" to --synchronization--.

On page 16, after line 12, insert --The method of the present invention may be stored as a series of executable program steps located on memories or data carriers accessible to the first computer system, the second computer system, and/or the trusted agent. Processors in these systems can perform the program steps stored on the memories or data carriers. The memories or data carriers may include but are not limited to RAMs, ROMs, disks and hard disk drives.--.

IN THE CLAIMS

Before claim 1, change "Claims" to --WHAT IS CLAIMED IS:--.

Claim 11, line 2, change "authorisation" to --authorization--.

Please change claims 14, 15 and 16 as follows:

14.(once amended) A [computer program] series of executable program steps stored on at least one computer readable memory [means for carrying out a method according to any

preceding method claims on a computer system], the program steps when executed by a computer system causing the computer system to perform a method for checking the access as recited in claim 1.

15. (once amended) A data carrier with a computer program for carrying out [a] the method according to [any of the preceding method claims] claim 1 on a computer system.

16. (once amended) A method for using a computer system for carrying out [a] the method according to [any of the preceding method claims] claim 1.

Conclusion

The present application is believed to be in condition for allowance and an early review of the application on its merits is hereby respectfully requested. Should the Examiner feel that an interview would advance prosecution of the present application, the Examiner is invited to contact the undersigned.

Respectfully submitted,



William C. Gehris (Reg. No. 38,156)

Dated: November 24, 1999

Davidson, Davidson & Kappel LLC
1140 Avenue of the Americas
15th Floor
New York, NY 10036
(212) 997 1028

Software AG

November 17, 1999

S28320US JH/mh

5

Method for Checking User Access

- 10 The present invention relates to a method of checking the access of a user operating a first computer system which is access controlled by a first security system to software and/or data on a second computer system which is access controlled by a second security system.
- 15 In many instances software applications and data shall be used across platforms. The wider and more heterogeneous availability of applications brings associated problems of authentication and authorisation, i.e. access control. In a distributed computer network the user access to a computer system is regularly controlled by an authentication and authorisation process, wherein the authentication refers to
- 20 the identity of the user, while the authorisation regards the user's actual rights of access. The authentication is generally effected at the user's point of entry by comparing the user's alleged identity, regularly given with his application for access, with the user's actual identity concluded from the given user individual password. The authorisation of the user results from checking a list of
- 25 permissions, which is registered in the computer's security system and which is, for example, exclusively accessible for system administrators, for the accuracy of the user's alleged or desired access permissions. This authentication and authorisation process follows different standards, depending on the software system used on the computer. Known solutions include SAF (Security Access
- 30 Facility) on IBM Mainframes (RACF, ACF2), Kerberos for UNIX and NTLM

- (NT LAN Manager) under Windows NT. Therefore, a user, who is working on a first computer system, the access to which is controlled by a first security system, may access software and/or data on a second computer system, the access to which is controlled by a second security system, only after being accepted by the second security system, which again performs an authentication and authorisation process. That means the user must apply to the second security system with a password and repeat the verification procedure regarding his identity and his rights of access. This is burdensome and time consuming. However, the direct communication between different security systems is generally not possible due to different formats of data processing and decision making within these security systems. Nevertheless, there is an ever growing need to access remote information or software quickly and easily without giving up the necessary access control. In so called single-sign-on solutions this disadvantage is avoided by passing the user password on from the first computer system to the second computer system. While this solution is convenient to the user it gives rise to significant security concerns, since the user password is passed to other computer systems without the desirable control by the user. Therefore, these solutions are generally discarded by the person skilled in the art if security is of particular concern.
- Therefore, the problem underlying the present invention is to provide a method or tool which allows a user operating on a first computer system to which he has been granted access by a first security system to access remote software and/or data on a second computer system which is access controlled by a second security system which is different from the first security system in a form and to an extent that the direct communication between the first and the second computer system or the corresponding security systems is not feasible. These differences maybe caused by different client/server configurations and mainframe architectures as well as by heterogeneous networks reflecting this different structure.

This problem is solved by a method for controlling the access of a user operating a first computer system under a first security system to software and/or data on a second computer system operating under a second security system comprising the following steps:

5

- a) Transmitting a user-id from said first computer system to said second computer system and a challenge from said second computer system to said first computer system. This user-id and challenge may have the format common for user-ids and challenges in known security systems.

10

- b) Transmitting said user-id and said challenge from said first computer system to said first security system. The transmission may be effected in any common or convenient way.

15

- c) Transmitting said user-id from said second computer system to a trusted agent and from said trusted agent to said second security system. The trusted agent is a piece of software which is installed inside or outside the second computer system.

20

- d) Transmitting a shared secret, which is registered in said first security system and in said second security system, from said second security system to said trusted agent and from said trusted agent to said second computer system.

25

- e) Calculating in said first security system a first response using said shared secret,

- f) Calculating in an access control unit of said second computer system, which access control unit is able to apply the rules of the first security system for calculating a response to a challenge, a second response to said challenge by using said shared secret.

5

The shared secret is registered, before the beginning of any communication across the different security systems, in the first and second security system, therefore it is shared by the two security systems. The shared secret may be any secret piece of data, preferably a user individual value. Even more preferably the shared secret is a hashed value of a password of a user, that means the result of a password which was subjected to a hash function, i.e. a one-way function which is comparably easy to carry out, but is virtually impossible to invert so that the password cannot be determined from the hashed value even when knowing the hash function.

15

The second response is calculated in an access control unit of the second computer system, which is controlled by the second security system. It may operate, for example, under OS/390, whereas the first computer system and the first security system may, for example, operate under Windows NT. For calculating the second response the access control unit needs to be able to apply the rules of the first security system for calculating a response to a challenge. This access control unit is, for example, a DCOM security system of the applicant or any other manufacturer, which applies the rules of the first security system operating under Windows NT, but runs in the OS/390 environment of the second computer system and the second security system. The calculation of the second response in the access control unit of the second computer system necessitates the knowledge of the shared secret stored in the second security system. Since a direct communication of the access control unit with the second security system is not possible, due to different operating structures, the shared secret is retrieved by said trusted agent. The trusted

30

agent is trusted by the second security system and can communicate with both the access control unit and the second security system.

5 The trusted agent preferably consists of two halves, one half for communication with the second computer system, the other half for communication with the second security system. The latter half may use standard, published interface calls. It need not contain any secrets, therefore its source code may be examined by a system administrator.

- 10 g) Transmitting said first response from said first security system to said first computer system.
- h) Transmitting said first response to said second computer system and comparing said first response and said second response in the second
- 15 computer system in order to complete the access check of said user. The second computer system compares the second response with the first response given by the first computer system. If they are identical the user is identified. If this is not the case, the user is denied access to the second computer system. After correct identification the authorisation checks can then be performed.
- 20 Thus the user may finally be authorised to access the second computer system and its information, which may be software applications, database or any other information.

25 In the scope of the present invention the first computer system may as well be a stand-alone device which is temporarily connected to a network, as it may be a permanent element of a computer network. Frequently, the first computer system comprises a client. The second computer system may be or comprise any computer device, including but not limited to a personal computer and a

mainframe. However, the assembly may also be used in reverse, i.e. the first computer system comprises a mainframe or server and the second computer system comprises a stand-alone computer or the like. The two computer systems are preferably linked by a WAN or a LAN, but may be temporarily or
5 permanently linked by every other suitable connection. It is preferred that they communicate via secure channels. Secure channels are lines of connection for data transmission which do not allow the recording of the transmitted data and the resending of this data thereby impersonating one of the partners of the communication. It is not requested that the secure channel may not be read from
10 outside. For example, the Secure Socket Layer (SSL) protocol can be used for providing secure channels.

The first and second security systems are systems which control the access of users to the first and second computer system, respectively. They may be
15 integrated into the corresponding computer system or as well be external devices. Frequently they are arranged at a central location within a network and controlled by the system administrators of the computer network.

Preferably, the authentication of the user is effected only in the first security
20 system, i.e. at the user point of entry, while the authorisation takes place in the second security system, i.e. at the point of execution of the distributed services. This avoids the need for multiple sign-ons to the different security systems. The result of the authentication is propagated for use in the authorisation process in the second computer system without the need to pass a user password at the time of
25 execution of the remote access to the second computer system. No footprint, that means no particular software, is necessary on the first computer system to achieve the authentication process.

The authorisation is performed in the second security system, i.e. at the time of execution of the desired software application or data use. The authorisation rules are stored in the second security system. Therefore, the existing security systems remain in action and their benefits can be enjoyed further on, like tight integration
5 in the respective operating system.

These operations are carried out without any participation of the user and without any problems being caused by differences of the two security systems or of the operating systems of the two computer systems. The trusted agent allows with the
10 help of a secret shared among the two security systems the indirect communication of the two security systems which, due to their differences, cannot communicate directly with each other. The trusted agent is internally structured in a way as to allow for its communication with the second security system of the remote computer system, particularly server, as well as with the first computer
15 system which is governed by the first security system. This communication of the trusted agent need not, but may be direct.

The shared secret may be established in the two security systems by the following steps:

20

a) Calculating the shared secret from a password of the user by subjecting said password to a secret function. This secret function may be any suitable function, that means any function which is sufficiently secure and which is not too easy to invert. It may be, for example, a hash function.

25

b) Registering said shared secret in the first security system, so that it may serve as a reference for verifying the user's authorisation and, if desired, identity.

- c) Calculating an encrypted value of the shared secret by subjecting said shared secret to an encryption function. Again, any convenient and sufficiently secure encryption code may be used.
- 5 d) Transmitting to the trusted agent and further to said second security system said encrypted value of the shared secret. The encryption was made in order to protect this transmission of the shared secret from the first to the second computer. If for this transmission the security standard achieved by encryption is, for any reason, not requested the encryption and later decryption of the
- 10 shared secret may be left away.
- e) Retrieving the shared secret in the second security system by decrypting the encrypted shared secret value.
- 15 f) Registering the shared secret in the second security system. Thereby, also the second computer system has, via the trusted agent, the necessary reference for the authentication process.

20 This initialisation process may be carried out only once when the user signs up to certain services or access possibilities. However, it may also, for security reasons, be done at the beginning of every session or at certain time intervals also during running sessions.

25 In the scope of the present invention also a trusted agent is provided for enabling the check of the access of a user operating a first computer system controlled by a first security system to software and/or data on a second computer system controlled by a second security system. This trusted agent comprises at least the following functions, which may be realized in hardware or in software:

- a) Reception of a user-id from said second computer system and transmission of said user-id to said second security system.
- 5 b) Retrieval of a shared secret, which is registered in the first security system and in the second security system, from the second security system.
- c) Transmission of said shared secret from the trusted agent to the second computer system.

10

Preferably, the first computer system is operated in this context under Windows NT and the second computer system is operated under OS/390. The access control unit of the second computer system then applies the rules of the Windows NT security protocol, which are also applied, in this example, by the first security
15 system.

15

All computations, transmissions, authentications, receptions, conversions, encryptions, registrations, etc., are carried out, preferably automatically, and in one or more digital computers or computer systems. The preferred realisation of
20 the trusted agent is also in a digital computer.

20

The invention is in the following exemplary described by means of the following drawings, which show:

25

Figure 1: Prior art DCOM security model on Windows NT

Figure 2: Prior art DCOM security model on IBM OS/390

Figure 3: Installation of a shared secret according to the present invention

Figure 4: Method of access control according to the present invention

Figure 5: Optional method of password synchronisation

- 5 Figure 1 shows the principle of the Distributed Component Object Model (DCOM) security concept as it is implemented by the company Microsoft in its system Windows NT. When a user, who works on a first computer system 1 (client), wants to access information, for example software or database information, on a second computer system 2 (server) he has to go through an authentication and authorisation process which is carried out under Windows NT, the operating system for the client 1 and the server 2. In a first step, represented by the arrow 5, the client 1 sends a user-id, domain name and node to the server 2, which responds with a challenge, represented by arrow 6. This challenge is passed, together with the user-id of the applying user, to the Primary Domain Controller (PDC) 3, which in this example is installed in the remote control location 4. This transfer is independently done by the client 1 to PDC 3, shown by arrow 8, and by server 2 to PDC 3, shown by arrow 11. The PDC 3 then calculates the response to the user-id and the challenge by using the hash value of a user individual password, i.e. the value which is received from subjecting a user individual password to a hash function. As explained earlier, a hash function is understood to be a one-way function, that means it may be applied in one direction without any problems, but it is virtually impossible to invert. The response is then transmitted to the client 1 and to the server 2, shown by arrows 9 and 10, respectively. Together with the response a session key is transmitted, which is session individual in order to render it more difficult to figure the system out. Finally, the client 1 transfers the response to the server 2, thereby proving his identity and authorisation.

Figure 2 shows the implementation of a DCOM security concept by the applicant, implemented to work in an IBM OS/390 environment. The basic structure of this concept is similar to the above described Microsoft concept. However, the functions of the PDC are replaced by the DCOM implementation. Here, a user
5 operating a client 21 contacts a server 22, both running under OS/390. By communication 25 the client 21 sends his user-id, which may represent an individual or a job, and requests access to the server 22. With communication 26 the server 22 answers the request for access with a challenge. Both, the client 21 and the server 22 pass the user-id and the challenge to the DCOM unit 23, by
10 communications illustrated by arrows 28 and 31, respectively. The DCOM unit 23 communicates via the Security Authorisation Facility (SAF) 32 with the security system 24, for example RACF, ACF/2 or TopSecret. The SAF 32 is an Application Program Interface (API) which conditionally directs control to the security system 24 when receiving a request from a resource manager. The
15 security system 24 provides the DCOM unit 23 with password information so that the latter is enabled to calculate the response to the user-id and challenge. This response is, together with a session key, sent back to the client 21 and the server 22 by communications represented by the arrows 29 and 30, respectively. Finally, the client passes the response by communication 27 to the server 22, which
20 accordingly allows or denies the access of the client 21.

The security systems described in Figures 1 and 2 are not compatible insofar as they cannot communicate directly with each other, due to their essentially different structure. For example, a DCOM object server executing in OS/390 is
25 not able to determine the correct response and session key for a remote client on Windows NT. They cannot, either directly or indirectly, communicate with a remote PDC, since no such API exists. But even if a mechanism could be implemented to enable PDC access from non-Windows systems it would be undesirable to most customers, since it is highly impractical during execution of
30 mission critical applications for performance reasons that mainframe services

should continually reference a remote Windows PDC before allowing access to DCOM objects which are executing on the same OS/390. The more fundamental problem, however, is that the two computer systems, the client and the server, run under different security systems so that the security information is not kept in the same system. In order to give one security system access to the secret information stored in the other security system the secret information would have to be transferred between the two security systems, which significantly affects the whole security concept. The method and system according to the present invention is able to avoid this problem.

10

Figure 3 shows the initialisation step for the inventive method, the installation of a shared secret among the two different security systems, for example the Windows NT and the OS/390 security systems. The client in this case is a first computer system 40, for example a NT Workstation. If the user enters or changes a password for his access to the first computer system, the client 40, the password or the password change, respectively, will be communicated to the first security system 41 which is responsible for the first computer system 40. The security system 41 may, for example, be a PDC of a Windows NT system, as described above. It is connected to a password change Dynamic Link Library (DLL) 42.

15

DLL 42 is itself connected to a first daemon 43. In the context of this invention a daemon is a process that listens continually for incoming communications and which is arranged at a dedicated port. In case of a password change the changed password or the difference between the old and the new password will be communicated by the first security system 41 to the DLL 42, which catches it and passes it on to the first daemon 43. This daemon 43 calculates a secure value of the password or password change by subjecting them to a function, e.g. a hash function, and subsequently transmits the secure value together with the user-id of the user to the second daemon 44 located on the second computer system 45, e.g. a server running under OS/390. The daemon 44 passes the secure value and the user-id on to a trusted agent 46 which then updates the second security system 47,

20

25

30

e.g. RACF for OS/390. Herewith, both the first security system 41 and the second security system 47 know the secure value, which represents the new password or the password change, which is therefore considered to be a shared secret. It may be noted that the trusted agent 46 need not be installed inside the second computer system 45, it could also be remotely located, for example at some administratively advantageous position.

In Figure 3, the transmission of the shared secret from the first daemon 43 to the second daemon 44 may be made more secure if the shared secret, i.e. the password hash is encrypted before sending it. The decryption may then take place somewhere in the second computer system, preferably in the second security system 47, which is the final recipient of the shared secret on the side of the second computer system 45.

Figure 4 shows an embodiment according to the present invention. A client 50 operating under a first security system 51, e.g. a NT workstation 50 operating under the control of PDC 51. The client 50 sends a request 54, consisting at least of a user-id, if necessary also of a domain name and a node, to the second computer system 64, preferably a server. The access control unit 57, e.g. a DCOM security system on OS/390 as described with Figure 2 above, in the second computer system 64, running in this example under OS/390, answers with a challenge 55. The first computer system 50 then passes the user-id and the challenge on to the first security system 51 by communication 52. The first security system 51 answers with the return of a first response and, regularly, a session key by communication 53. This first response is calculated by means of a shared secret registered in the first security system 51. The access control unit 57 passes the user-id on to trusted agent 60 by communication 58. The trusted agent 60 then transfers the user-id to the second security system 63, e.g. a RACF for OS/390. This second security system 63 returns the shared secret to the trusted agent 60 which passes it on to the access control unit 57 thereby enabling the

latter to calculate a second response and, if required, the session key. The access control unit 57 is able to apply the same rules for calculating a response to a challenge as the first security system 51. Finally, the first computer system 50 passes its first response by communication 56 to the access control unit 57 of the second computer system 64 which compares it with the second response obtained from the trusted agent 60. If the first and second responses are identical the user or client is granted access, otherwise the access is denied.

The trusted agent 60, in the example of the second computer system running under OS/390, must obtain control in APF state, that means it executes as an authorized program. APF state means that a program was loaded from a program library that was defined as an authorized library, and the program was linked with AC=1. In this state it is permitted to manipulate protected MVS control blocks in ways that permit bypassing normal security controls. It can, for example, pass calls to the security system 63 on behalf of other users and can access user data. One task of the trusted agent 60 is, as described, to receive new hashed passwords and store them in the security system 63. When a new encrypted password hash is received for a specific user-id that user's security profile is updated with the new value and the status field is set appropriately. The security system 63 then has all the necessary information to allow this user access under OS/390. The other task of the trusted agent 60 is to assist in authentication by retrieving the encrypted hashed password value from the security system 63, as described above.

In the example described in Figure 4 the trusted agent 60 may be tightly "bound" to the access control unit 57 via a dedicated communication pipe, according to the following principle: At installation time a system administrator specifies that the trusted agent, when it runs, will be started in a process with APF status. Whenever the access control unit 57 on OS/390 starts it opens a dedicated communication pipe and initiates the trusted agent process. This guarantees that only the access

control unit 57 can start and communicate with the trusted agent. On the side of the second security system 63 the trusted agent 60 uses standard communication calls, e.g. SAF API calls.

5 The inventive method described in connection with Figure 4 provides cross-platform interoperability between different security systems without the transfer of any user passwords during normal operation, which is always a weak point in any distributed security system. This method is non-invasive. That means, there is no impact on the user or on the security systems. That means if the user chooses
10 to access the second computer system directly, rather than remotely through the first computer system, his SAF security profile is unaffected. Security administrators do not need to modify their security environments in any way and can continue to use existing security rules. The inventive solution may use standard APIs (Application Program Interfaces) of existing security systems.
15 Additionally, the inventive method can be easily extended to support evolving security systems.

An optional feature of the inventive method, which, however, may weaken the security of the system, is the ability to automatically synchronise passwords
20 across systems and platforms. An exemplary embodiment for this feature is shown in Figure 5. It shows the concept of a password synchronisation between two different security systems. Regularly, the different security systems use different passwords to check the access to their system. If the password of a user for his entry into a first computer system 70 running under a first security system shall be
25 changed and this change shall be communicated to a second computer system 72 operating under a second, different security system 75 in order to synchronize the passwords under the two security systems, the client 70 sends the user-id, old and new password and the shared secret, e.g. the hash value, derived from the new password, all in encrypted form to the trusted agent 73. The trusted agent 73 is in
30 communication with the second computer system 72 and may but need not be, as

- it is shown here, part of the second computer system 72. The trusted agent 73 decrypts the transmitted encrypted information and passes the new password and the shared secret calculated from the new password to the second security system 75. The result of this process is that the second security system disposes of the full information about the passwords of the first security system for the user concerned. Herewith, the communication between the security systems is rendered much easier, since any confusion resulting from the use of different passwords is avoided.
- 10 The present invention therefore provides a method and tool for facilitating the controlled access of a user of a first system to remote second systems, wherein the systems are controlled by different security systems.

Software AG

November 17, 1999
S28320US JH/Hd/mh

5

Claims

1. A method for checking the access of a user operating a first computer system controlled by a first security system to software and/or data on a second computer system controlled by a second security system comprising the following steps:
- a) transmitting a user-id from said first computer system to said second computer system and a challenge from said second computer system to said first computer system,
 - b) transmitting said user-id and said challenge from said first computer system to said first security system,
 - c) transmitting said user-id from said second computer system to a trusted agent and from said trusted agent to said second security system,
 - d) transmitting a shared secret, which is registered in said first security system and in said second security system, from said second security system to said trusted agent and from said trusted agent to said second computer system,
 - e) calculating in said first security system a first response using said shared secret,
 - f) calculating in an access control unit of said second computer system, which access control unit is able to apply the rules of the first security system to calculate a response to a challenge, a second response to said challenge using said shared secret,

- g) transmitting said first response from said first security system to said first computer system, and
- h) transmitting said first response from said first computer system to said second computer system and comparing said first response and said second response in the second computer system in order to complete the access check of said user.
- 5
2. A method according to claim 1, characterized in that the shared secret is individual to said user.
- 10
3. A method according to claim 2, characterized in that the shared secret is a hashed value of a password of said user.
4. A method according to claim 1, characterized in that the second computer system comprises a system which issues said challenge and calculates said second response according to the rules of the first security system.
- 15
5. A method according to claim 1, characterized in that the shared secret is established by the following steps:
- 20
- calculating a shared secret of a password of said user by subjecting said password to a secret function,
 - registering said shared secret in said first security system controlling said first computer system,
 - calculating an encrypted shared secret of said shared secret by subjecting said shared secret to an encryption function,
 - 25 - transmitting said encrypted shared secret to said trusted agent and further to said second security system,

- retrieving said shared secret in said second security system by decrypting said encrypted shared secret, and
- registering said shared secret in said second security system controlling said second computer system.

5

6. A method according to claim 1, characterized in that the second computer system comprises a server.

10

7. A method according to claim 1, characterized in that the first computer system comprises a client.

8. A method according to claim 1, characterized in that the first and the second computer system are linked by a WAN or a LAN.

15

9. A method according to claim 1, characterized in that the first computer system is operated under Windows NT and the second computer system is operated under OS/390.

20

10. A method according to claim 1, characterized in that the communication between the first and the second computer system is done via secure channels.

11. A method according to claim 1, characterized in that the authentication of said user is effected in the first computer system and the authorisation of said user is effected in the second computer system.

25

12. A trusted agent for enabling the check of the access of a user operating a first computer system controlled by a first security system to software and/or data on a second computer system controlled by a second security system comprising the following functions:

- 5 a) reception of a user-id from said second computer system and transmission of said user-id to said second security system,
- b) retrieval of a shared secret, which is registered in said first security system and in said second security system, from said second security system, and
- 10 c) transmission of said shared secret from said trusted agent to said second computer system.

13. A trusted agent according to claim 12, characterized in that the first computer system is operated under Windows NT and the second computer system is operated under OS/390.

15 14. A computer program stored on computer readable memory means for carrying out a method according to any of the preceding method claims on a computer system.

20 15. A data carrier with a computer program for carrying out a method according to any of the preceding method claims on a computer system.

16. A method for using a computer system for carrying out a method according to any of the preceding method claims.

Software AG

November 17, 1999
S28320US JH/Hd/mh

5

Abstract

10 A method for checking the access of a user operating a first computer system controlled by a first security system to software and/or data on a second computer system controlled by a second security system comprising the following steps:

- a) transmitting a user-id from said first computer system to said second computer system and a challenge from said second computer system to said first computer system,
- 15 b) transmitting said user-id and said challenge from said first computer system to said first security system,
- c) transmitting said user-id from said second computer system to a trusted agent and from said trusted agent to said second security system,
- d) transmitting a shared secret, which is registered in said first security system and in said second security system, from said second security system to said trusted agent and from said trusted agent to said second computer system,
- 20 e) calculating in said first security system a first response using said shared secret,
- 25 f) calculating in an access control unit of said second computer system, which access control unit is able to apply the rules of the first security system to calculate a response to a challenge, a second response to said challenge using said shared secret,

- g) transmitting said first response from said first security system to said first computer system, and
- h) transmitting said first response from said first computer system to said second computer system and comparing said first response and said second response in the second computer system in order to complete the access check of said user.

5

Fig. 1

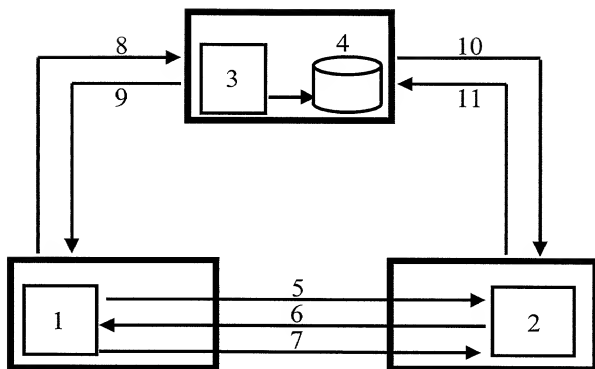


Fig. 2

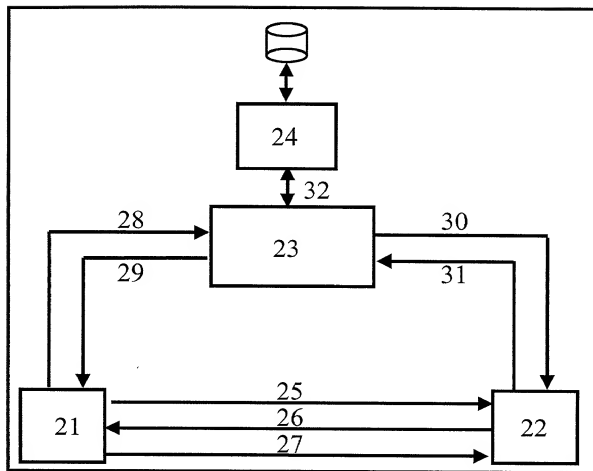


Fig. 3

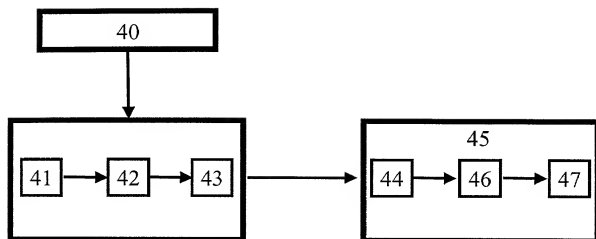


Fig. 4


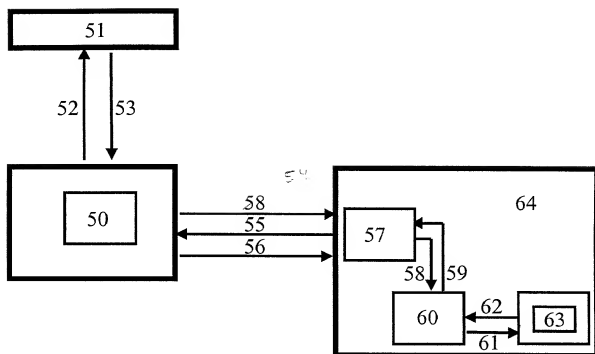


Fig. 5



DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD FOR CHECKING USER ACCESS**; the specification of which (check one)

X is attached hereto
 was filed on _____ as Application Serial No. _____
 and was amended on _____ (if applicable).
 I hereby authorize and request our attorney, Davidson, Davidson & Kappel, L.L.C. of 1140 Avenue of the Americas, New York, New York 10036 to insert here in parentheses (Application number _____, filed _____) the filing date and application number of said application when known.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is known to me to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign and/or provisional application(s) for patent or inventor's certificate listed below and have also identified below any foreign and/or provisional application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR APPLICATION(S)			Priority claimed
99103951.2	Europe	8/3/99	<u>X</u>
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial Number)	(Filing Date)	(Status) (patented, pending, abandoned)

And I hereby appoint Clifford M. Davidson, Registration No. 32,728, Leslye B. Davidson, Registration No. 38,854, Cary S. Kappel, Registration No. 36,561, William C. Gehris, Registration No. 38,156, Robert J. Paradiso, Registration No. 41,240, Jane E. Alexander, Registration No. 36,014, Scott L. Appelbaum, Registration No. 41,587, and Marc D. Baker, Registration No. 44,017, my attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith; correspondence address: DAVIDSON, DAVIDSON & KAPPEL, L.L.C., 1140 Avenue of the Americas, 15th Floor, New York, New York 10036; Telephone: (212) 997-1028; Fax: (212) 997-1037.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first
 Inventor Neil Beesley
 Inventor's signature _____
 Date _____
 Residence Issaquah, WA 98027
 Citizenship U.S.A.
 Post Office Address: F302 Mountain Ridgebrook
210 Mountain Park Blvd., S.W.
Issaquah, WA 98027

Full name of joint
 Inventor, if any Dietmar Gaertner
 Second Inventor's signature _____
 Date _____
 Residence Ober-Ramstadt, Germany
 Citizenship GERMAN
 Post Office Address: Weimarstrasse 56
64372 Ober-Ramstadt, Germany

Full name of joint
 Inventor, if any James Holme
 Third Inventor's signature _____
 Date _____
 Residence Bickenbach, Germany
 Citizenship GERMAN
 Post Office Address: Waldstrasse 51
64404 Bickenbach, Germany

Full name of joint
 Inventor, if any Terence Kennedy
 Fourth Inventor's signature _____
 Date _____
 Residence Darmstadt, Germany
 Citizenship GERMAN
 Post Office Address: Korellweg 16
64297 Darmstadt, Germany

Full name of joint
Inventor, if any Dieter Kessler

Fifth Inventor's signature _____
Date _____
Residence Weierstadt, Germany
Citizenship GERMAN
Post Office Address: Moselstrasse 29
64131 Weierstadt, Germany

Full name of joint
Inventor, if any Thomas Vogler

Sixth Inventor's signature _____
Date _____
Residence Darmstadt, Germany
Citizenship GERMAN
Post Office Address: Frankfurter Strasse 74
64293 Darmstadt, Germany